

LPDWOP...H60N 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:


E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For the installation with cable ladders use 2 pairs of LDOCH60N or LDOCH60E with 16 sets of Screw SGN M8×14 or SGN M8×14 E

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables

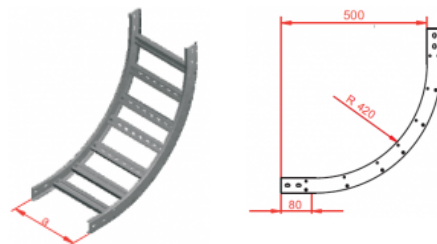

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDWOP100H60N	100	865910	1	1,67
LPDWOP200H60N	200	865920	1	2,03
LPDWOP300H60N	300	865930	1	2,43
LPDWOP400H60N	400	865940	1	2,79
LPDWOP500H60N	500	865950	1	3,42
LPDWOP600H60N	600	865960	1	3,82

Connected products:


 DGOD...H60N
Cable Ladder

 DGOD...H60E
Cable Ladder

 DGOP...H60N
Cable Ladder

 DGOP...H60E
Cable Ladder

 LDC/LDOCH60
Straight
Connector

 LDOCH60E
Ladder coupler

 LGC/LGOCH60
Articulated
Connector

 LKDOCH60N
Angle Connector

 LKDOCH60E
Angle Connector

 ZM/ZMO Hold
Down Clamp

 ZMOE Hold
Down Clamp


SGN Screw Set



SM... Screw Set



NS... Nut



PP... Washer



PW... Washer