

KKMPJ...H110 45° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

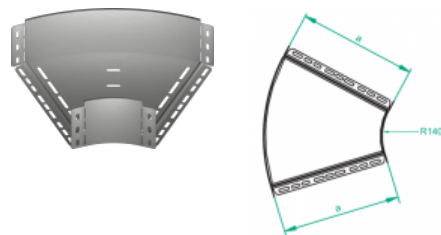

For installation use Screw Sets **SGK M6×12** or **SG M6×12**.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMPJ100H110	100	121514	10	0,50
KKMPJ150H110	150	121614	10	0,63
KKMPJ200H110	200	121714	10	0,77
KKMPJ300H110	300	121814	4	1,12
KKMPJ400H110	400	121914	4	1,53
KKMPJ500H110	500	122014	2	2,01
KKMPJ600H110	600	122114	2	2,53