

LUMP...H110 90° Vertical Bend

Overview:

Application

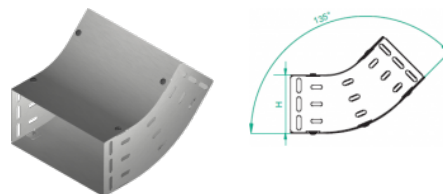
Diversions in cable routing.

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)


For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

 Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMP100H110	100	123210	10	1,61
LUMP150H110	150	123215	10	1,97
LUMP200H110	200	123220	4	2,34
LUMP300H110	300	123230	4	3,16
LUMP400H110	400	123240	2	3,89
LUMP500H110	500	123250	2	4,59
LUMP600H110	600	123260	2	5,33