

KKSMC...H200 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

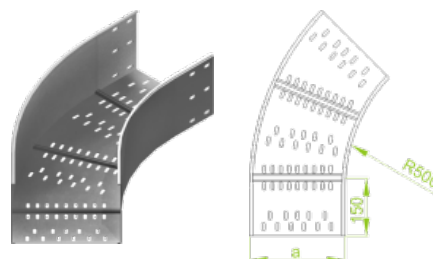

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKSMC200H200	200	290822	2	8,16
KKSMC300H200	300	290832	2	9,78
KKSMC400H200	400	290842	2	11,45
KKSMC500H200	500	290852	2	13,29
KKSMC600H200	600	290862	2	14,91