

LKMC...H50 Straight Connector

Overview:

APPLICATIONS

Connecting cable routes.

MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F- steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304)

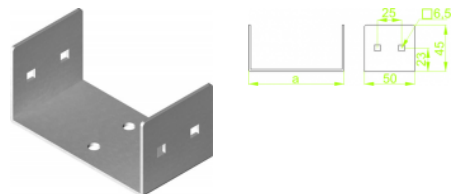

Use Screw Sets SGKM6×14 to install

Sheet thickness: **2,0 mm**

Versions:

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LKMC200H50	195	810520	2	0,34
LKMC300H50	295	810530	2	0,45
LKMC400H50	395	810540	2	0,57
LKMC500H50	495	810550	2	0,68
LKMC600H50	595	810560	2	0,80