


## KGJ/KGOJ...H60 Cable Tray

### Overview:

**APPLICATION**  
 Cable routing

**MATERIAL**  
 Steel, strip-galv. acc. to the  
 Sendzimir method PN-EN 10346:2011  
 Available finishes:  
 L- powder coating in a full range of colours (PC)

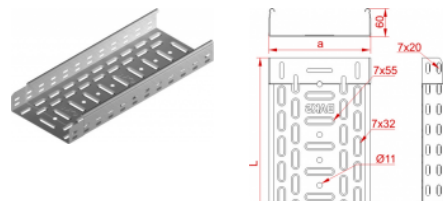

**Connecting cable trays by sliding-in and screwing together**

**Max. safe load: 20 kg/m**  
**Max. spacing of supports: 1.5m**

### Versions:

Sheet thickness: **1,0 mm**

| Symbol           | Length L [m] | Width a [mm] | Catalogue number | Quantity in box | Weight [1m] |
|------------------|--------------|--------------|------------------|-----------------|-------------|
| KGJ/KGOJ100H60/3 | 3000         | 100          | 160816           | 6               | 1,63        |
| KGJ/KGOJ150H60/3 | 3000         | 150          | 160916           | 6               | 1,98        |
| KGJ/KGOJ200H60/3 | 3000         | 200          | 161016           | 6               | 2,28        |
| KGJ/KGOJ300H60/3 | 3000         | 300          | 161116           | 6               | 2,96        |
| KGJ/KGOJ400H60/3 | 3000         | 400          | 161216           | 4               | 3,65        |