


KCJ/KCOJ...H60E Cable Tray

Overview:

APPLICATION
 Cable routing

MATERIAL
 Stainless steel, grade 1.4301 (AISI304)
 Available finishes:
 L- powder coating in a full range of colours (PC)

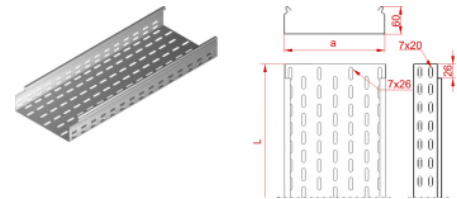

Connecting cable trays by sliding-in and screwing together

Max. safe load: 20 kg/m
Max. spacing of supports: 1.5m

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KCJ/KCOJ100H60/3E	3000	100	861910	6	1,63
KCJ/KCOJ150H60/3E	3000	150	861915	6	1,98
KCJ/KCOJ200H60/3E	3000	200	861920	6	2,28
KCJ/KCOJ300H60/3E	3000	300	861930	6	2,96
KCJ/KCOJ400H60/3E	3000	400	861940	4	3,65