


KCL/KCOL...H60F Cable Tray

Overview:

APPLICATION
 Cable routing

MATERIAL
 Steel, hot-dip galvanised
 to PN-EN ISO 1461:2011 (HDG)
 Available finishes:
 L- powder coating in a full range of colours (PC)

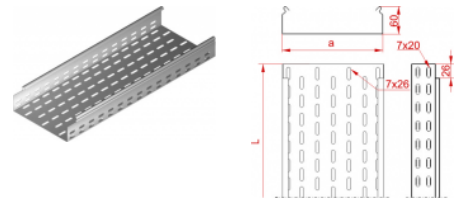

Connecting cable trays by sliding-in and screwing together

Max. safe load: 20 kg/m
Max. spacing of supports: 1.5m

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KCL/KCOL150H60/ 3F	3000	150	169516	6	1,43
KCL/KCOL200H60/ 3F	3000	200	169521	6	1,68
KCL/KCOL300H60/ 3F	3000	300	169531	4	2,18