


## KCJ/KCOJ...H60F Cable Tray

### Overview:

**APPLICATION**  
Cable routing

**MATERIAL**  
Steel, hot-dip galvanised  
to PN-EN ISO 1461:2011 (HDG)  
Available finishes:  
L- powder coating in a full range of colours (PC)

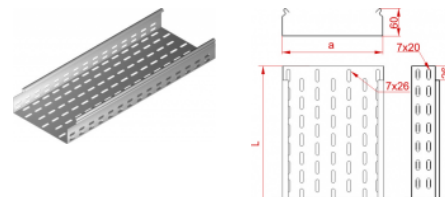

**Connecting cable trays by sliding-in and screwing together**

**Max. safe load: 20 kg/m**  
**Max. spacing of supports: 1.5m**

### Versions:

Sheet thickness: **1,0 mm**

| Symbol            | Length L [m] | Width a [mm] | Catalogue number | Quantity in box | Weight [1m] |
|-------------------|--------------|--------------|------------------|-----------------|-------------|
| KCJ/KCOJ100H60/3F | 3000         | 100          | 169611           | 6               | 1,63        |
| KCJ/KCOJ150H60/3F | 3000         | 150          | 169616           | 6               | 1,98        |
| KCJ/KCOJ200H60/3F | 3000         | 200          | 169621           | 6               | 2,28        |
| KCJ/KCOJ300H60/3F | 3000         | 300          | 169631           | 6               | 2,96        |
| KCJ/KCOJ400H60/3F | 3000         | 400          | 169641           | 4               | 3,65        |