

KCP/KCOP...H60F Cable Tray


Overview:

APPLICATION
 Cable routing

MATERIAL
 Steel, hot-dip galvanised
 to PN-EN ISO 1461:2011 (HDG)
 Available finishes:
 L- powder coating in a full range of colours (PC)

Connecting cable trays only with connectors

Max. safe load: 20 kg/m
Max. spacing of supports: 1.5m

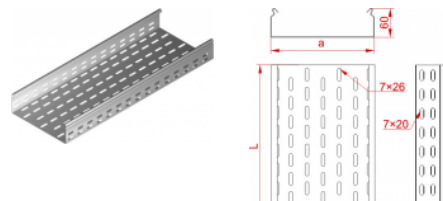

Versions:

Sheet thickness: **1,5 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KCP/KCOP100H60/3F	3000	100	169311	6	2,07
KCP/KCOP150H60/3F	3000	150	169314	6	2,49
KCP/KCOP200H60/3F	3000	200	169321	4	2,90
KCP/KCOP300H60/3F	3000	300	169331	4	3,33
KCP/KCOP400H60/3F	3000	400	169341	2	3,73
KCP/KCOP500H60/3F	3000	500	169351	2	6,48
KCP/KCOP600H60/3F	3000	600	169361	2	7,47