

KKMBJ...H60 45° Horizontal Bend


Overview:

APPLICATION

Diversion in cable routing.

MATERIAL

Steel, strip-galv. acc. to the
 Sendzimir method PN-EN 10346:2011
 Available finishes:
 F - steel, hot-dip galvanised
 to PN-EN ISO 1461:2011 (HDG)
 E - stainless steel, grade 1.4301 (AISI304)
 L - powder coating in a full range of colours (PC)

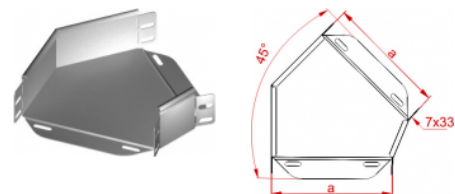

For the assembly use:

- Width 100÷200 - min. 10 sets of Screw
- Width 300÷400 - min. 12 sets of Screw
- Width 500÷600 - min. 14 sets of Screw SGKM6x12

Versions:

Sheet thickness: 1,0 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMBJ100H60	100	160103	20	0,29
KKMBJ150H60	150	160203	10	0,41
KKMBJ200H60	200	160303	10	0,55
KKMBJ300H60	300	160503	10	0,91
KKMBJ400H60	400	160603	10	1,54