

RKSP...H60 Straight Reducer


Overview:

APPLICATION

Reducing/extending widths of cable runs

MATERIAL

Steel, strip-galv. acc. to the
Sendzimir method PN-EN 10346:2011
Available finishes:
F - steel, hot-dip galvanised
to PN-EN ISO 1461:2011 (HDG)
E - stainless steel, grade 1.4301 (AISI304)
L - powder coating in a full range of colours (PC)

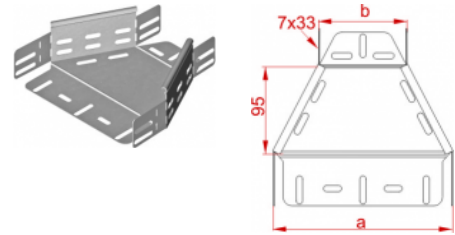

For the assembly use Screw SGKM6x12

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
RKSP150/100H60	150	166015	10	0,34	100
RKSP200/100H60	200	168502	10	0,39	100
RKSP200/150H60	200	168602	10	0,43	150
RKSP300/200H60	300	168702	10	0,51	200
RKSP400/300H60	400	166040	10	0,62	300
RKSP500/400H60	500	166050	10	0,74	400
RKSP600/500H60	600	166060	10	0,85	500