


PKJS... Cover

Overview:

APPLICATION

Eliminating the risk of mechanical damage to cables. Improving overall aesthetic appearance of cable runs

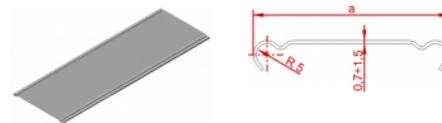

MATERIAL

Steel, strip-galv. acc. to the Sendzimir method PN-EN 10346:2011 steel, hot-dip galvanised to PN-EN ISO 1461:2011 (HDG)
Available finishes:
FE-
stainless steel (SS), odcinki 3m (pokrywy korytek siatkowych)
L- powder coating in a full range of colours (PC)

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PKJS60/3	3000	60	900406	20	0,64
PKJS100/3	3000	100	900410	10	1,04
PKJS150/3	3000	150	900415	10	1,44
PKJS200/3	3000	200	900420	10	1,84
PKJS300/3	3000	300	900430	6	2,64
PKJS400/3	3000	400	900440	6	3,44
PKJS500/3	3000	500	900450	4	4,24
PKJS600/3	3000	600	900460	4	5,04