

LZWMC...H100 45° Vertical Bend - Internal

Overview:

APPLICATION

Diversion in cable routing

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray lengths use Straight Connectors LZC...

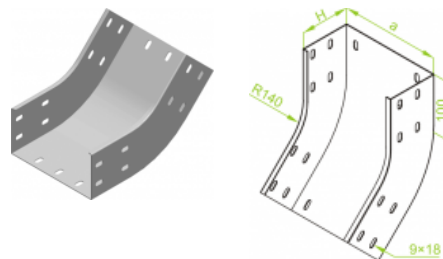

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZWMC100H100	100	312110	6	1,58
LZWMC200H100	200	312120	6	2,10
LZWMC300H100	300	312130	4	2,52
LZWMC400H100	400	312140	4	2,99
LZWMC500H100	500	312150	2	3,47
LZWMC600H100	600	312160	2	3,93

Connected products:



KZWC...H100
Reinforced
Cable Tray



KZLC...H100
Cable Tray with
Integral
Connector



LZCH100
Straight
Connector



LZGCH100
Articulated
Connector



LCC...H100
U-Shaped
Connector



KKZC...H100 90°
Horizontal Bend



KKZMC...H100
45° Horizontal
Bend



TKZC...H100
Horizontal Tee



CZKZC...H100
Horizontal
Cross-over



LZZC...H100 90°
Vertical Bend -
External



LZZMC...H100
45° Vertical
Bend - External



LZWC...H100
90° Vertical
Bend - Internal



TRZC...H100
Vertical Tee -
Lengthwise



RKZC...H100
Straight
Reducer