

LPDC...H100N Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

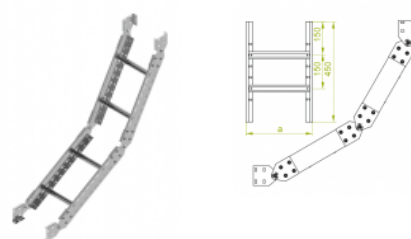

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDC100H100N	100	492510	2	8,34
LPDC200H100N	200	492520	2	8,85
LPDC300H100N	300	492530	2	9,38
LPDC400H100N	400	492540	2	10,13
LPDC500H100N	500	492550	2	10,38
LPDC600H100N	600	492560	2	10,90