

ZSP1... Zacisk


Overview:

Zastosowanie

Podwieszanie lekkich konstrukcji
do profili otwartych.

Materiał

Stal sprężysta cynkowana.

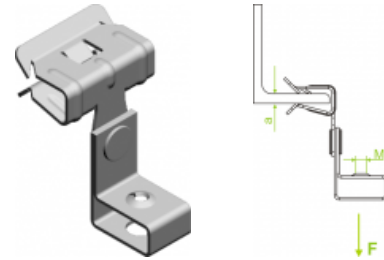

Versions:

Sheet thickness: **1,0 mm**

Symbol	Numer katalogowy	Ilość w opakowaniu	Obciążenie maksymalne F max [kN]	Wymiar M [mm]	Grubość a
ZSP1M6/2	790101	100	0,70	6	2-3
ZSP1M6/3	790201	100	0,90	6	3-8
ZSP1M6/8	790301	100	0,90	6	8-14
ZSP1M6/14	790401	100	0,90	6	14-20
ZSP1M8/2	790501	100	0,70	8	2-3
ZSP1M8/3	790601	100	0,90	8	3-8
ZSP1M8/8	790701	100	0,90	8	8-14
ZSP1M8/14	790801	100	0,90	8	14-20
ZSP1M10/2	790901	100	0,70	10	2-3
ZSP1M10/3	791001	100	0,90	10	3-8
ZSP1M10/8	791101	100	0,90	10	8-14
ZSP1M10/14	791201	100	0,90	10	14-20

Connected products:

