


KBP...H80 Cable Tray

Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)




Important!
Possibility of joining cable tray KBR..., KBL..., KBJ... and KBD... sections together through sliding one into another and connector-free assembly. Cable Tray sections of KBP... can be joined up only through the use of connectors (lack of cut in the flange at the end of side profile).
Available when ordering in large quantity are 6m long tray sections.
To install cable tray use Screw Sets SGK M6x12 or SG M6x12.

Versions:

Sheet thickness: **1,5 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KBP100H80/3	3000	100	182010	6	3,48	7800
KBP150H80/3	3000	150	182015	4	4,08	11800
KBP200H80/3	3000	200	182020	4	4,68	15800
KBP300H80/3	3000	300	182030	4	5,88	23800
KBP400H80/3	3000	400	182040	2	7,08	31800
KBP500H80/3	3000	500	182050	2	8,28	39800
KBP600H80/3	3000	600	182060	2	9,48	47800

Connected products:

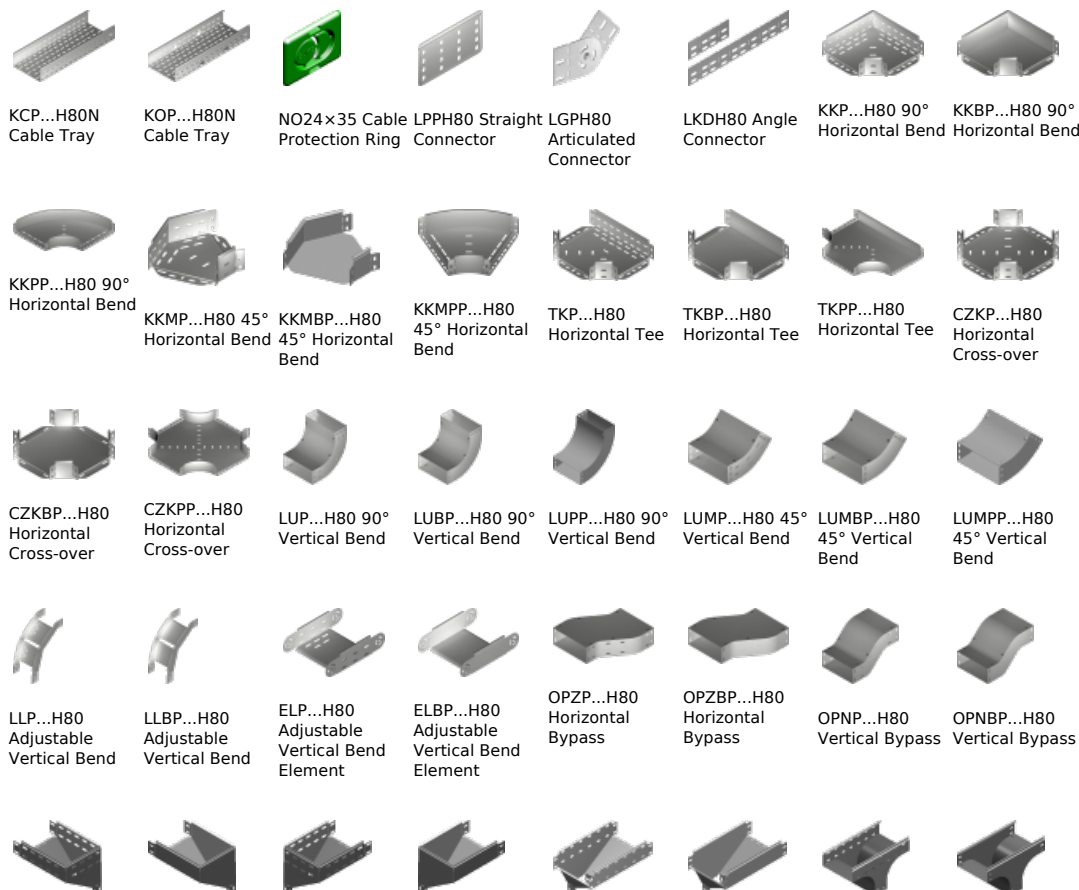

KRPP...H80 Vertical Elbow - Right	KRPBP...H80 Vertical Elbow - Right	KRLP...H80 Vertical Elbow - Left	KRLBP...H80 Vertical Elbow - Left	TRP...H80 Vertical Tee -Lengthwise	TRBP...H80 Vertical Tee -Lengthwise	TRSP...H80 Vertical Tee - Crosswise	TRSBP...H80 Vertical Tee - Crosswise
							
RKLP...H80 Left Reducer	RKLPB...H80 Left Reducer	RKLP...H80 Left Right Reducer	RKLPB...H80 Right Reducer	RKSP...H80 Straight Reducer	RKSBP...H80 Straight Reducer	TKDP...H80 Add-on Tee	LRPPH80 Corner Connector