


KBD...H80 Cable Tray

Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)




Important!
Possibility of joining cable tray KBR..., KBL..., KBJ... and KBD... sections together through sliding one into another and connector-free assembly. Cable Tray sections of KBP... can be joined up only through the use of connectors (lack of cut in the flange at the end of side profile).
Available when ordering in large quantity are 6m long tray sections.
To install cable tray use Screw Sets SGK M6x12 or SG M6x12.

Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KBD100H80/3	3000	100	181810	6	2,90	7800
KBD150H80/3	3000	150	181815	4	3,40	11800
KBD200H80/3	3000	200	181820	4	3,90	15800
KBD300H80/3	3000	300	181830	4	4,90	23800
KBD400H80/3	3000	400	181840	2	5,90	31800
KBD500H80/3	3000	500	181850	2	6,90	39800
KBD600H80/3	3000	600	181860	2	7,90	47800

Connected products:

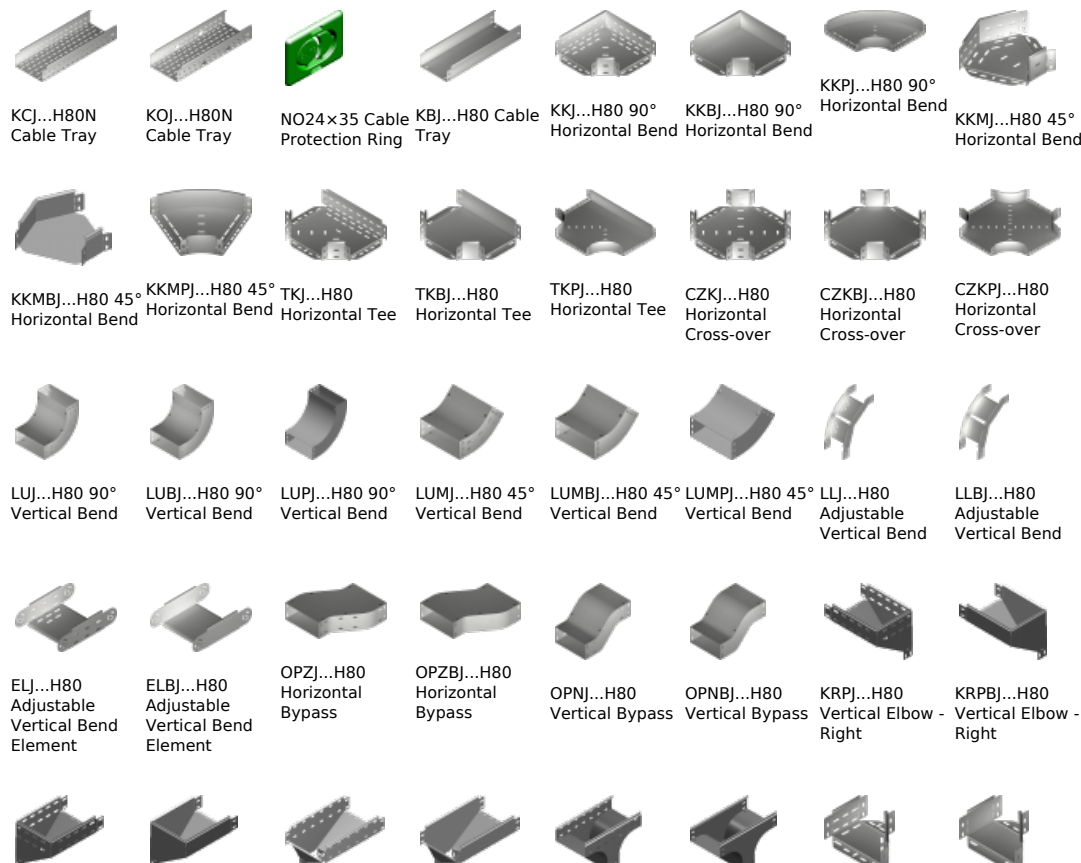

KRLJ...H80 Vertical Elbow - Left	KRLBJ...H80 Vertical Elbow - Left	TRJ...H80 Vertical Tee -Lengthwise	TRBJ...H80 Vertical Tee -Lengthwise	TRSJ...H80 Vertical Tee - Crosswise	TRSBJ...H80 Vertical Tee - Crosswise	RKLJ...H80 Left Reducer	RKLBJ...H80 Left Reducer
							
RKPJ...H80 Right Reducer	RKPBJ...H80 Right Reducer	RKSJ...H80 Straight Reducer	RKSBJ...H80 Straight Reducer	LRJH80 Corner Connector	LRBJH80 Corner Connector	TKDJ...H80 Add-on Tee	LRPJH80 Corner Connector